


Multi-Circuit power supply Manual



Thank you for using our products. Please read this manual carefully before using our products.


Product introduction

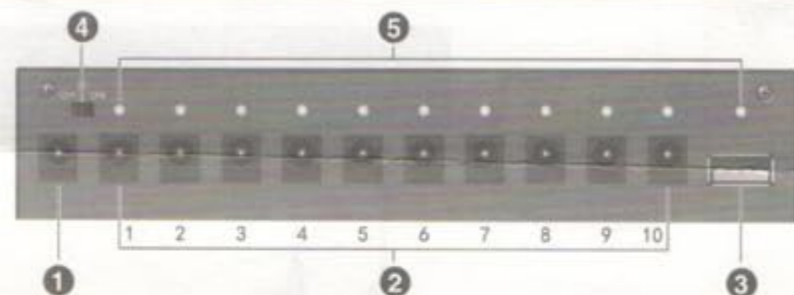


- 1 DC5521 power input socket: Please ensure the power input is DC 18V 1A. Plug standard with negative internal and positive external.
 - 2 DC5521 power output socket: From left to right, #1-7 output provide DC 9V 100mA; #8 output provides DC 9V 500mA; #9 output provides DC 12V 100mA; #10 output provides DC 18V 100mA.
 - 3 USB charging: output 5V 1A.
 - 4 Power status indicator switch.
 - 5 Power status indicator lights: When the indicator switch is on, indicator lights will be on to show available power supply sockets.
- ◆ Short circuit protection
In case a socket has a short circuit equipment plugged in or gets current overload, it will stop providing power. Once the equipment is disconnected from DC5521, the power of the socket will resume.

Instructions

1. The product can be used directly after connecting with the supplementary adapter. Select appropriate socket according to different device power requirements, shown as below.

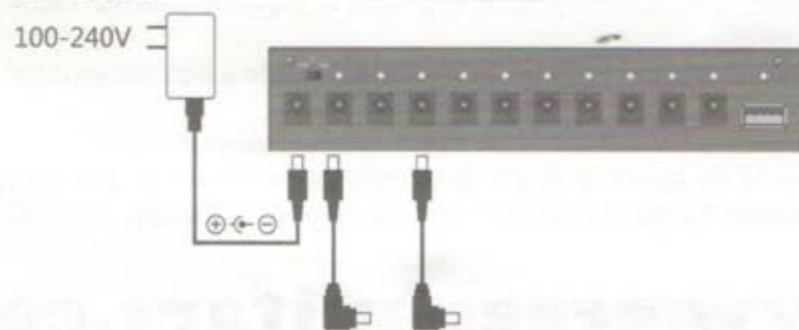

2. If the power adapter is not the original adapter, please make sure the power is 18V 1A with polarity negative internal and positive external. If the adapter does not meet the requirement, please use a polarity conversion cable shown as below.

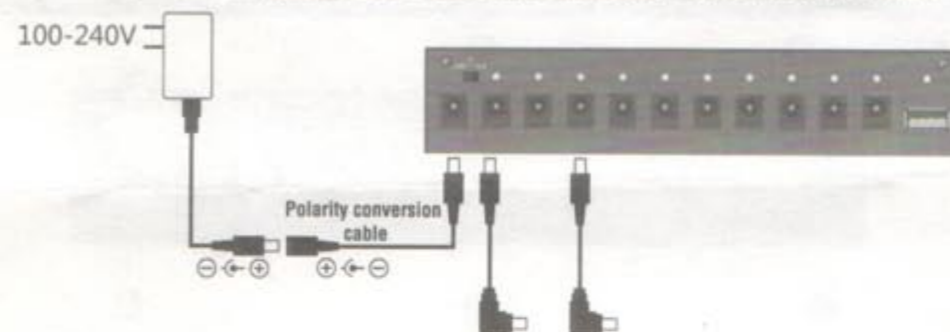

- ◆ Attention:
Please check the polarity of power adapter before using, or it may damage the equipment.

Specifications & Packing

- ◆ Adapter specification: Input: AC 100-240 50/60 Hz
Output: DC 18V 1A
- ◆ Product size: 17.2 x 4.5 x 3.3 cm
- ◆ Packing Weight: 530g
- ◆ Package includes:
 - 1 x Power supply
 - 1 x Power adapter
 - 1 x User manual
 - 8 x 55cm connector
 - 2 x 20cm polarity conversion line

Attention

- ◆ This product is not waterproof. To avoid electric shock, please keep away from water and do not use this product in a moist or any other potential liquid risk environment.
- ◆ Do not disassemble or attempt short circuit or use in a high temperature environment.
- ◆ Do not put this product in a place where children can easily touch.
- ◆ Please use the specified adapter to avoid problems caused by different specification.
- ◆ Please store the product in a dry environment when not in use.

www.creepguitars.com

made in china